
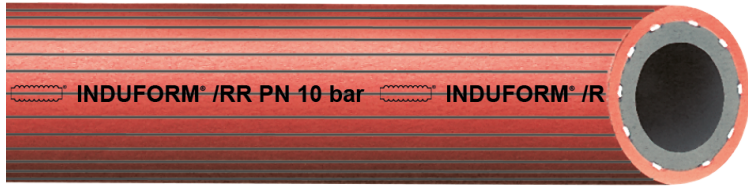


INDUFORM®/RR



Water hose
for medium duty applications.

Marking:  Induform®/RR PN 10 bar

Norm	EN ISO 1307:2008	Construction tube	Smooth
Working pressure at 20°C	10,0 bar	Color tube	Black
Bursting pressure	30 bar	Compound cover	PVC
Min. temperature	-20 °C	Cover	Ribbed
Max. temperature	+60 °C	Color cover	Red
Compound tube	PVC	Reinforcements	Polyester plies

Art.-no.	Ø Inner (mm)	Wall (mm)	Ø Outer (mm)	Bending radius (mm)	Weight (kg/mtr)	Length (mtr)
3000013000	13,0	3,0	19,0	80	0,205	40/100
3000019000	19,0	3,5	26,0	110	0,340	40
3000025000	25,0	4,0	33,0	150	0,495	40
3000032000	32,0	6,0	44,0	180	0,975	40

Application: High quality ribbed water hose that is characterized by the strong cross-braided insertions and a production process in which the inner and outer walls are connected with each other with heat, which offers a much stronger adhesion than many glued alternatives. Hose can be used as a water supply hose at construction sites in industry, shipyards and other locations where higher quality requirements are set for a water hose. Due to its special construction, hose is extremely suitable for reel applications.

Remark:

- Cutted length not possible

We recommend assembly with

5310
Geka® couplings



5354
Geka® nozzle



6060
ABA clamps

