


## BETONCORD®/10

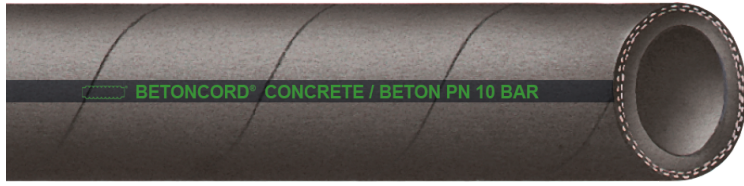

### Concrete hose

Marking:  Betoncord® Concrete / Beton PN 10 bar

Norm	EN ISO 1307:2008, ISO 4649 (previous DIN 53516)	Abrasion value tube	70 mm <sup>3</sup>
Working pressure	10 bar	Construction tube	Smooth
Bursting pressure	30 bar	Color tube	Black
Min. temperature	-30 °C	Compound cover	NR/SBR
Max. temperature	+80 °C	Cover	Fabric finish
Electr. resistance tube	Electrical conductive <10 <sup>6</sup> Ω	Color cover	Black
Electr. resistance cover	Electrical conductive <10 <sup>6</sup> Ω	Reinforcements	Textile plies
Compound tube	NR/SBR		

Art.-no.	Ø Inner (mm)	Wall (mm)	Ø Outer (mm)	Bending radius (mm)	Weight (kg/mtr)	Length (mtr)
3521060000	60,0	10,0	80,0	600	2,680	20/40
3521063090	63,0	13,5	90,0	650	3,930	40

**Application:** Hose is being used in the building / construction, mining, tunneling, civil engineering (restoration / renovation work) and others. Suitable for transporting concrete mortar and other wet abrasive materials such as grouting mortar, plaster, plaster mortar and others. The hose can also be used for dry substances such as cement and blasting grit. Very long lifespan due to thick wear resistant tube and cover.

**Remark:**

- Cutted length possible

