


SILOFLAT

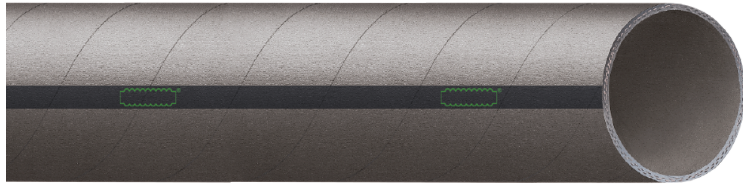

Dry cargo discharge hose, layflat

Marking:

Norm	EN ISO 1307:2008, ISO 4649 (previous DIN 53516)	Construction tube	Smooth
Working pressure	4 bar	Color tube	Black
Min. temperature	-30 °C	Compound cover	SBR/NR
Max. temperature	+85 °C	Cover	Fabric finish
Compound tube	NR	Color cover	Black
Abrasion value tube	100 mm ³	Reinforcements	2 Static wires, Textile plies

Art.-no.	Ø Inner (mm)	Wall (mm)	Ø Outer (mm)	Weight (kg/mtr)	Length (mtr)
3540075000	76,0	4,5	85,0	1,420	40
3540100000	102,0	6,0	114,0	2,460	40

Application: Suitable for cement, lime powder, animal feed and other abrasive materials. Used, among other things, for concrete silos, hose is suitable for pressure application.

Remark:

- Cutted length possible

We recommend assembly with

5110
Storz couplings



6036
BAND-IT strapping

