


## RADIACORD®/DIN

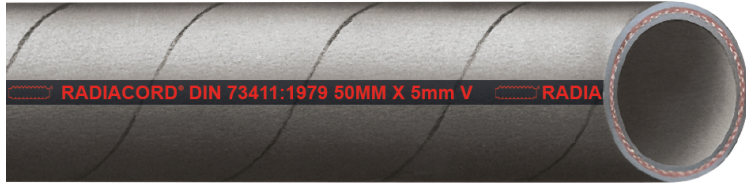

### Standardized radiator and hot water hose

suitable for the most common cooling liquids. Also suitable for hot water and cooling water applications.

Marking: Radiacord® DIN 73411:1979 DN x wall thickness V - year / quarter

Norm	DIN 73411 from July 1979, EN ISO 1307:2008
Working pressure	4 bar
Bursting pressure	12 bar
Min. temperature	-30 °C
Max. temperature	+130 °C
Compound tube	EPDM

Construction tube	Smooth
Color tube	Black
Compound cover	EPDM
Cover	Fabric finish
Color cover	Black
Reinforcements	Textile plies

Art.-no.	Ø Inner (mm)	Wall (mm)	Ø Outer (mm)	Weight (kg/mtr)	Length (mtr)
3117010000	10,0	3,0	16,0	0,160	40
3117013000	13,0	3,5	20,0	0,230	40
3117015000	15,0	3,5	22,0	0,260	40
3117018000	18,0	3,5	25,0	0,300	40
3117020000	20,0	3,5	27,0	0,330	40
3117022000	22,0	3,5	29,0	0,360	40
3117025000	25,0	3,5	32,0	0,400	40
3117028000	28,0	4,0	36,0	0,500	40
3117030000	30,0	4,0	38,0	0,540	40
3117032000	32,0	4,0	40,0	0,580	40
3117035000	35,0	4,0	43,0	0,620	40
3117038000	38,0	5,0	48,0	0,800	40
3117040000	40,0	5,0	50,0	0,900	40
3117042000	42,0	5,0	52,0	0,940	40
3117045000	45,0	5,0	55,0	1,000	40
3117048000	48,0	5,0	58,0	1,060	40
3117050000	50,0	5,0	60,0	1,100	40
3117055000	55,0	5,0	65,0	1,200	40
3117060000	60,0	5,0	70,0	1,300	40
3117065000	65,0	5,0	75,0	1,400	40
3117070000	70,0	5,0	80,0	1,500	40
3117075000	75,0	5,0	85,0	1,600	40
3117080000	80,0	5,0	90,0	1,700	40
3117090000	90,0	6,0	102,0	2,300	40
3117100000	100,0	6,0	112,0	2,500	20
3117110000	110,0	6,0	122,0	2,800	20
3117120000	120,0	7,0	134,0	3,500	20

### Remark:

- Cutted length possible

### We recommend assembly with

5327  
Hose coupling



5340  
Hose tail



6060  
ABA clamps

