


NIPLAFLEX®

Multi purpose hose

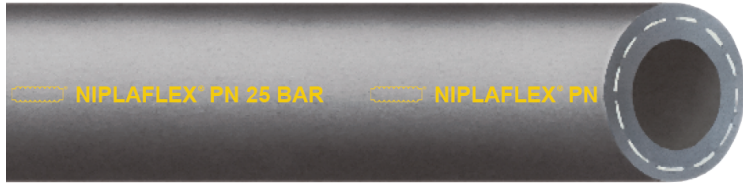

Marking:  Niplaflex® PN 25 bar

Norm	EN ISO 1307:2008	Color tube	Black
Working pressure at 20°C	25,0 bar	Compound cover	NBR/PVC
Bursting pressure	75 bar	Cover	Smooth
Min. temperature	-20 °C	Color cover	Black
Max. temperature	+70 °C	Resistance cover	Ageing resistant, Ozone resistant, UV resistant, Weather resistant
Compound tube	NBR/PU/PVC	Reinforcements	Polyester plies
Construction tube	Smooth		

Art.-no.	Ø Inner (mm)	Wall (mm)	Ø Outer (mm)	Bending radius (mm)	Weight (kg/mtr)	Length (mtr)
3240006000	6,0	3,0	12,0	40	0,115	100
3240008000	8,0	3,5	15,0	50	0,170	100
3240009000	9,0	3,5	16,0	55	0,185	100
3240010000	10,0	3,5	17,0	60	0,200	100
3240013000	13,0	4,0	21,0	80	0,290	100
3240019000	19,0	4,5	28,0	110	0,450	50
3240025000	25,0	5,5	36,0	160	0,715	50

Application: Very flexible, oil and petrol resistant multipurpose hose. Also suitable for the transport of water, air, light acids and alkalis, pesticides and fertilizers. Hose is used in construction, building, agriculture, industry, workshops, etc.

Remark:

- Cutted length possible

We recommend assembly with

5200
Air couplings



5201
Air couplings



6030
Pincher clamps

