


CAVOCORD

Cable protection hose

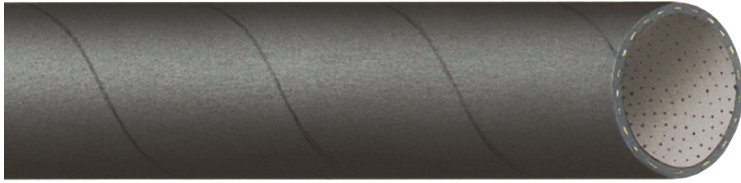

Norm	EN ISO 1307:2008	Compound tube	SBR, with visible textile plies
Min. temperature	-30 °C	Construction tube	Mandrel built
Max. temperature	+85 °C	Compound cover	SBR
Electr. resistance tube	Insulating >10 ⁹ Ω	Cover	Fabric finish
Electr. resistance cover	Insulating >10 ⁹ Ω	Color cover	Black

Art.-no.	Ø Inner (mm)	Wall (mm)	Ø Outer (mm)	Weight (kg/mtr)	Length (mtr)
3290020000	20,0	1,5	23,0	0,120	40
3290022000	22,0	1,5	25,0	0,140	40
3290025000	25,0	1,5	28,0	0,160	40
3290028000	28,0	1,5	31,0	0,180	40
3290030000	30,0	1,5	33,0	0,190	40
3290032000	32,0	1,5	35,0	0,200	40
3290035000	35,0	1,5	38,0	0,220	40
3290040000	40,0	1,5	43,0	0,250	40
3290045000	45,0	1,5	48,0	0,280	40
3290050000	51,0	1,5	54,0	0,340	40

Application: The hose is suitable for bundling or protecting hoses and cables, chains, welding torches and various other applications where it is important that the products are protected against damage or other external conditions. Thin wall and easily coverable.

Remark:

- Cutted length not possible

