


QUADRIFLEX

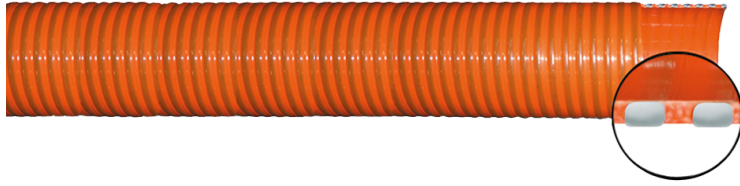

Thermoplastic suction hose

Marking: Quadriflex - Dimension

Norm	EN ISO 1307:2008	Color tube	Orange
Vacuum	0,90 bar	Compound cover	PVC
Min. temperature	-25 °C	Cover	Smooth
Max. temperature	+60 °C	Color cover	Orange
Compound tube	Soft PVC	Reinforcements	Rigid PVC spiral
Construction tube	Smooth	Color spiral	Anthracite

Art.-no.	Ø Inner (mm)	Wall (mm)	Ø Outer (mm)	Bending radius (mm)	Weight (kg/mtr)	Length (mtr)
4460050000	51,0	4,5	60,0	204	0,950	50
4460075000	76,0	5,0	86,0	304	1,600	50
4460080000	80,0	5,0	90,0	320	1,700	50
4460090000	90,0	5,0	100,0	360	1,950	50
4460100000	102,0	6,0	114,0	408	2,420	50
4460110000	110,0	5,5	121,0	440	2,600	30
4460125000	127,0	6,5	140,0	508	3,300	20
4460150000	152,0	7,5	167,0	608	4,400	4/5/20

Application: For transport of (industrial) water and slurry. The hose has been used to full satisfaction in the public sector and in agriculture for years. The Quadriflex has an oval spiral instead of round, resulting in a significant weight reduction and a smooth outer wall. The smooth outer wall ensures that the hose does not get stuck behind well edges, fences or other edges and can therefore be used in water purification installations, water reservoirs, slurry pits, etc. The hose can also be fitted easily with couplings and hose clamps without the need for a NBR cord or other resources, as is the case with various other corrugated hoses.

Remark:

- Cutted length possible (ID 152 4m/5m excluded)

We recommend assembly with

<p>5721 Perrot couplings</p>	<p>5710 Bauer couplings</p>	<p>6200 Super clamps</p>
----------------------------------	---------------------------------	------------------------------

