


Ball valve type 9100

With full flow

one side female BSP thread and one side male BSP thread

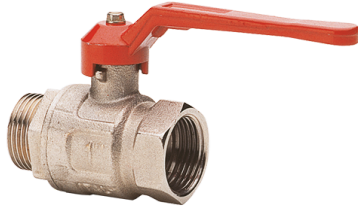

Norm thread	DIN EN ISO 228-1
Thread description	BSPP thread / G-thread
Min. temperature	-20 °C
Max. temperature	+150 °C
Material seal/gasket	PTFE
Material type body	Chrome plated brass
Ball material	Hard chrome plated hot pressed brass
Material handle	Steel
Colour handle	Red

Art.-no.	Female thread	Male thread	Bore mm	Built-in length (mm)	WP at 20°C (bar)	Weight (kg/pce)
5245006910	1/4"	1/4"	8	54	50,0	0,134
5245010910	3/8"	3/8"	10	54	50,0	0,139
5245013910	1/2"	1/2"	15	58,5	50,0	0,196
5245019910	3/4"	3/4"	20	66,5	40,0	0,318
5245025910	1"	1"	25	78,5	40,0	0,464
5245032910	1.1/4"	1.1/4"	32	91,5	30,0	0,760
5245038910	1.1/2"	1.1/2"	40	105,5	30,0	1,110
5245050910	2"	2"	50	122	25,0	1,700

Remark:

- Not suitable for steam applications!

