


Europa

Spring loaded check valve

suitable for horizontal, vertical and oblique position. Both sides female thread, equipped with longitudinal valve.

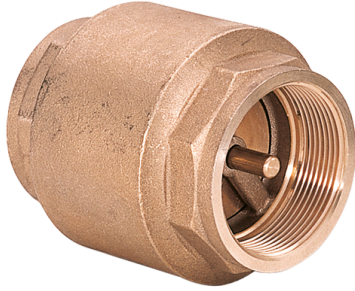

Norm thread	DIN EN ISO 228-1
Thread description	BSPP thread / G-thread
Min. temperature	-20 °C
Max. temperature	+100 °C
Material seal/gasket	NBR
Material type body	Brass
Internal seat	Stainless steel 1.4301
Material spring	Stainless steel 1.4301

Art.-no.	Female thread	Built-in length (mm)	WP (bar)	Weight (kg/pce)
5264013000	1/2"	58,5	25	0,193
5264019000	3/4"	65	25	0,285
5264025000	1"	74,5	25	0,413
5264032000	1.1/4"	83	18	0,634
5264038000	1.1/2"	93	18	0,867
5264050000	2"	101	18	1,312

