



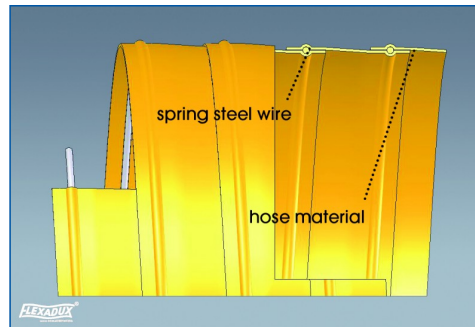

# FLEXADUX® P 2 PU Food

**Light weight and very flexible  
Polyurethane ducting**

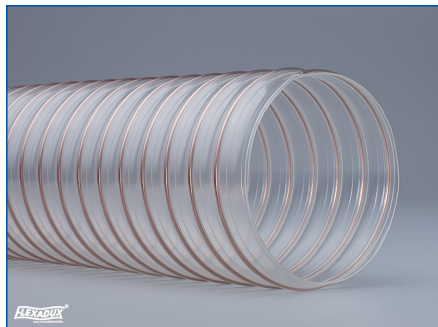

**Material:**

Polyether-Polyurethane, clear



**Single Length:**

6, 10 and 15 m

**Temperature Resistance:**

- 40° up to + 100° C

**Applications:**

Suction of air, dust, oil and petrol fumes, suitable for applications in food- and pharmaceutical industry

**Properties:**

Excellent flexibility, good abrasion resistance, good compressibility, resistant to hydrolysis and microbes, food grade acc. to EG regulation no. 1935/2004 and no. 10/2011, FDA standard 21 CFR 177.2600 and 178.2010, approval confirmed by an independent testing institute for the whole hose acc. to EG regulation no. 10/2011

## TECHNICAL DATA

Dia. (mm)	Weight (kg/m)	Wall Thickness (mm)	Bending radius (mm)	Max. Work. Press. (bar)	Max. Vacuum (bar)
25	0,13	0,4	18	0,65	0,30
30	0,17	0,4	21	0,60	0,30
40	0,23	0,4	28	0,50	0,25
50	0,30	0,4	35	0,40	0,20
60	0,34	0,4	42	0,40	0,16
70	0,40	0,4	49	0,35	0,14
75	0,43	0,4	53	0,30	0,10
80	0,46	0,4	56	0,28	0,10
100	0,51	0,4	70	0,20	0,09
120	0,60	0,4	85	0,20	0,08
125	0,65	0,4	88	0,20	0,08
140	0,71	0,4	95	0,15	0,06
150	0,78	0,4	105	0,10	0,06
175	0,90	0,4	123	0,09	0,05
200	1,05	0,4	140	0,08	0,05
250	1,25	0,4	175	0,05	0,04
300	1,55	0,4	210	0,03	0,03
350	1,80	0,4	245	0,02	0,02
400	2,10	0,4	280	0,02	0,02
450	2,35	0,4	315	0,01	0,01
500	2,62	0,4	350	0,01	0,01
600	4,60	0,4	400	0,01	0,01
710	5,44	0,4	475	0,01	0,01
800	6,13	0,4	535	0,01	0,01

Further diameters available upon request!

Technical data are based on + 23° C.



**SCHAUENBURG RUHRKUNSTSTOFF GMBH**

Weseler Str. 35 · 45478 Mülheim-Ruhr · Germany · Tel. +49 (0) 2 08 99 91-0 · Fax +49 (0) 2 08 5 33 74 · mail@schauenburg-rk.com