




FLEXADUX® P 7 M PU PAS Food

**Heavy weight and flexible
polyurethane hose, antistatic and
food proved**

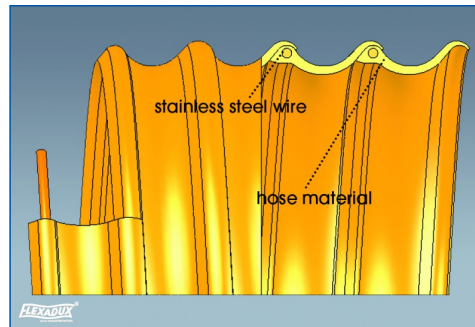

Material:

Polyether-polyurethan / Spiral: stainless steel wire (material code: 1.4310), clear

Single Length:

10 and 15 m

Temperature Resistance:

- 40° up to + 100° C

Applications:

Suction and discharging of abrasive and granular materials, suitable for applications in food and pharmaceutical industry

Properties:

Resistant to hydrolysis and microbes, non toxic, food proved according to FDA-regulation 21 CFR 177.2600, permanently antistatic ($R \leq 10^9$ Ohm), conform to TRGS 727, very smooth bore, excellent abrasion resistance, good flexibility

TECHNICAL DATA

Dia. (mm)	Weight (kg/m)	Wall-Thickness (mm)	Bend. Rad. (mm)	max. Work.Press. (bar)	max. Vacuum (bar)
25	0,34	1,40	38	3,00	0,90
30	0,42	1,40	45	3,00	0,90
40	0,54	1,40	60	2,30	0,70
50	0,67	1,40	75	1,90	0,60
60	0,80	1,40	90	1,80	0,55
70	0,92	1,40	105	1,60	0,50
75	0,99	1,40	113	1,40	0,50
80	1,05	1,40	120	1,20	0,45
90	1,18	1,40	135	1,10	0,40
100	1,52	1,40	150	1,10	0,40
110	1,67	1,40	165	1,00	0,35
120	1,82	1,40	180	0,90	0,30
125	1,89	1,40	188	0,80	0,25
140	2,11	1,40	210	0,70	0,20
150	2,43	1,40	225	0,70	0,20
160	2,59	1,40	240	0,60	0,20
175	2,82	1,40	263	0,55	0,15
200	3,37	1,40	300	0,50	0,15
225	3,78	1,40	338	0,40	0,10
250	4,19	1,40	375	0,30	0,10
300	5,01	1,40	450	0,30	0,10
350	5,33	1,40	525	0,25	0,09
400	6,08	1,40	600	0,20	0,09
450	6,83	1,40	675	0,10	0,08

Further diameters available upon request!

Technical data are based on + 23° C.



SCHAUENBURG RUHRKUNSTSTOFF GMBH

Weseler Str. 35 · 45478 Mülheim-Ruhr · Germany · Tel. +49 (0) 2 08 99 91-0 · Fax +49 (0) 2 08 5 33 74 · mail@schauenburg-rk.com